



## Submittal Sheet

# NTI COMPACT

## Mini-tank electric water heaters

Project Name: \_\_\_\_\_




Date: \_\_\_\_\_

Location: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

### 1. SPECIFICATIONS


MODEL	NTI COMPACT 2.5	NTI COMPACT 4	NTI COMPACT 6
Tank capacity	2.7 gal	4.0 gal	7.0 gal *
Dimensions	13¾" W x 13¾" H x 10¾" D	13¾" W x 13¾" H x 13½" D	17⅝" W x 17⅝" H x 14½" D
Weight (empty)	15.5 lbs	17.3 lbs	29.5 lbs
Maximum Water pressure	150 psi	150 psi	150 psi
Recovery rate at 90°F rise	6.8 gal/h	6.8 gal/h	6.8 gal/h
Temperature range	65 – 145 °F	65 – 145 °F	65 – 145 °F
Water connections	½" NPT	½" NPT	¾" NPT
Relief valve	Installed	Installed	Included
Nominal Voltage (1 phase)	110/120 Vac	110/120 Vac	110/120 Vac
Nominal current	12 A	12 A	12 A
Power at 120 Vac	1,440 W	1,440 W	1,440 W
Electrical Connection	Plug-in	Plug-in	Hard wired
Sizing			

\* 5.1 gal if installed vertically




## 2. DIMENSIONS

NTI COMPACT 2.5 and NTI COMPACT 4

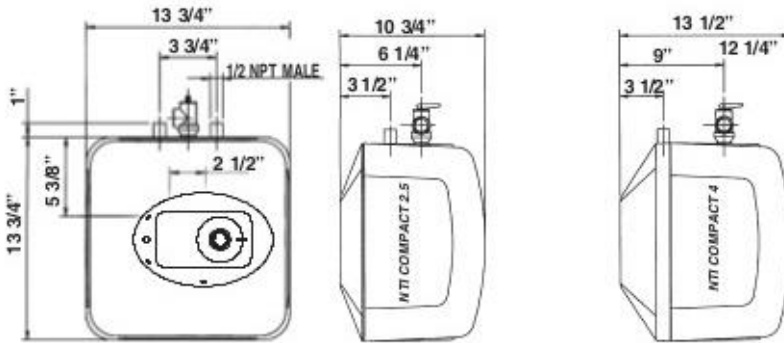

NTI COMPACT 6 – Horizontal installation

NTI COMPACT 6 – Vertical installation

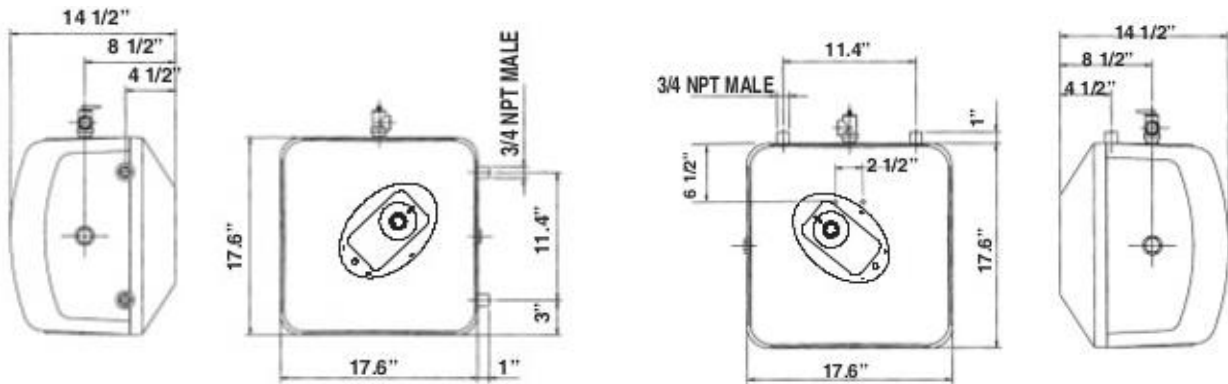

## 3. INSTALLATION AND MAINTENANCE

For installation and maintenance instructions please refer to product manual.

NOTICE: anode rod shall be inspected at least once a year to verify its status and replace it when needed. Damages resulting from failure to replace the anode are not covered under manufacturer's warranty.