

# TRITON High Efficiency Hot Water Oil-Fired Heating Boiler



## SERIES VS TRITON

- Available with the advanced **SENTRY 2000** Micro Processor-based Controller, which provides precise and efficient boiler operations, resulting in increased comfort and reduced fuel consumption
- Efficient dry base boiler
- Unique water baffle increases unit recovery rate
- Reversible return located on right side keeps burner free of leaks and obstructions
- 1 1/4" supply port recessed to eliminate air
- 1 1/4" baffled return eliminates short cycling
- Combustion chamber is supported by a spacer to keep base cool and to make chamber removal and replacement easy, while preventing damages
- Unique design reduces jacket and standby losses
- Raised flange tankless coil
- High capacity Heat Exchanger Coil provides ample, inexpensive domestic hot water
- Computer-aided design by experts
- Easy servicing from the front & top
- Compatible burners - Beckett, Aero, Riello
- Certified and rated to strict CSA codes

When you choose NTI, you choose the new standard in top quality boilers!

More than 30 years of boiler and furnace manufacturing experience is built into everything we sell, and we won't bring a new product to you until it has passed rigorous performance and quality testing.

You can trust our commitment to excellence in quality, reliability and customer service. And you can count on years of trouble-free, safe and comfortable heat. Only from NTI.



MODEL	INPUT	GROSS OUTPUT (BTU)	NET OUTPUT (BTU)	EFFICIENCY	APPROX. WEIGHT (lbs.)
VS 80	0.65	78,000	70,200	86%	417
VS 90	0.75	90,000	81,000	86%	417
VS 100	0.85	105,000	95,000	89%	417
VS 120	1.00	121,000	109,000	87%	417
VS 130	1.10	133,000	120,000	87%	417
VS 150	1.25	150,000	135,000	86%	417
VS 160	1.35	162,000	145,000	86%	417
VS 180	1.50	174,000	156,000	83%	417
VS 210	1.75	202,000	181,000	83%	417

## BOILER SPECIFICATIONS

Boiler Shell .....	VS80-210
Shipping Weight (lbs.) .....	417
Supply & Return Size .....	1 1/4"
Height .....	34"
Depth .....	21"
Width .....	21"
Stack Size .....	7"
Water Vol. (Imp. Gal.) .....	15
Max. Coil Size .....	ONE, S-5
Tube Quantity .....	24


Because we never stop improving the durability and performance of our quality line of products, we reserve the right to change specifications without prior notice.

For more information, please contact:



**NYTHERMAL INC.**  
 31 Industrial Drive  
 Sussex, New Brunswick  
 E4E 2R7 Canada  
 Tel: 506-432-1130  
 Fax: 506-432-1135

[www.nythermal.com](http://www.nythermal.com)

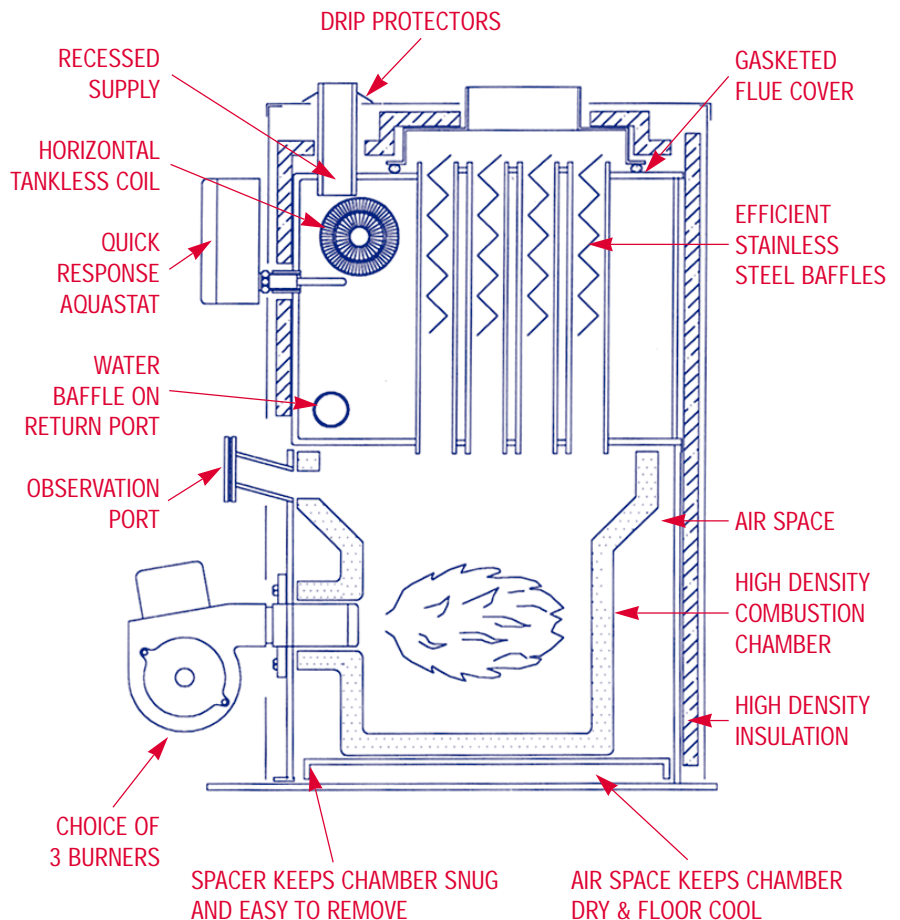

Distributor: